



AMBERLITE® IRA96

Industrial Grade Weak Base Anion Exchanger

PRODUCT DATA SHEET

AMBERLITE IRA96 is a macroreticular weak base anion exchange resin. Its very stable structure and limited reversible swelling make it very resistant to osmotic shock. The high degree of porosity of this resin provides efficient adsorption of large organic molecules and their desorption during regeneration, thus allowing excellent protection against organic fouling.

AMBERLITE IRA96 is intended primarily for the removal of strong acids from water following a strongly acidic cation exchange resin, and it provides excellent protection against organic fouling for the strong base anion exchange resin placed downstream in a deionization plant.

PROPERTIES

Matrix _____	Styrene divinylbenzene copolymer
Functional groups _____	Tertiary amine
Physical form _____	Opaque spherical beads
Ionic form as shipped _____	Free base (FB)
Total exchange capacity ^[1] _____	≥ 1.25 eq/L (FB form)
Moisture holding capacity ^[1] _____	57 to 63 % (FB form)
Specific gravity _____	1.040 to 1.060 (FB form)
Shipping weight _____	670 g/L
Particle size _____	
Uniformity coefficient _____	≤ 1.80
Harmonic mean size _____	550 to 750 µm
Fine contents ^[1] _____	< 0.300 mm : 1.0 % max
Coarse beads _____	> 1.180 mm : 1.0 % max
Maximum reversible swelling _____	FB → Cl ⁻ : 15 %

^[1] Contractual value

Test methods are available on request.

SUGGESTED OPERATING CONDITIONS

Maximum operating temperature _____	100°C
Minimum bed depth _____	700 mm
Service flow rate _____	5 to 40 BV*/h
Regenerant _____	NaOH NH ₃ Na ₂ CO ₃
Flow rate (BV/h) _____	2 to 8 2 to 8 2 to 8
Concentration (%) _____	2 to 4 2 to 6 5 to 8
Level (% of ionic load) _____	120 150 200
Minimum contact time _____	30 minutes
Slow rinse _____	2 BV at regeneration flow rate
Fast rinse _____	4 to 8 BV at service flow rate

* 1 BV (Bed Volume) = 1 m³ solution per m³ resin

PERFORMANCE

The Engineering data sheet EDS 0255 A provides information to calculate the operating capacity of AMBERLITE IRA96 used in water treatment.

LIMITS OF USE

AMBERLITE IRA96 is suitable for industrial uses. For all other specific applications such as pharmaceutical, food processing or potable water applications, it is recommended that all potential users seek advice from Rohm and Haas in order to determine the best resin choice and optimum operating conditions.

HYDRAULIC CHARACTERISTICS

Figure 1 shows the bed expansion of AMBERLITE IRA96 as a function of backwash flow rate and water temperature.

Figure 2 shows the pressure drop data for AMBERLITE IRA96 as a function of service flow rate and water temperature. Pressure drop data are valid at the start of the service run with a clear water and a correctly classified bed.

These data are valid for water treatment and have to be corrected according to the solution to be treated.

Figure 1: Bed Expansion


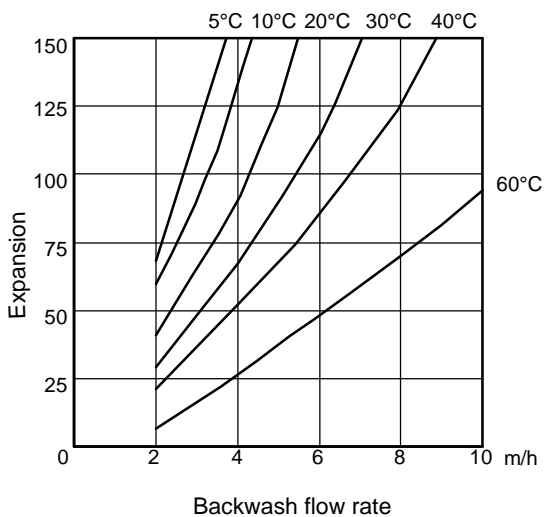


Figure 2: Pressure Drop

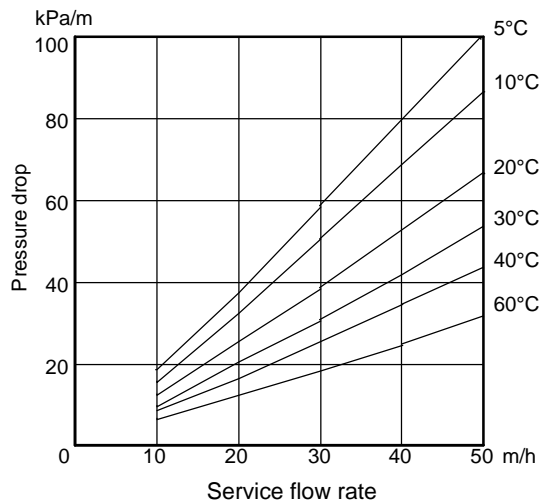

All our products are produced in ISO 9002 certified manufacturing facilities.

Rohm and Haas/Ion Exchange Resins - Philadelphia, PA - Tel. (800) RH AMBER - Fax: (215) 537-4157
Rohm and Haas/Ion Exchange Resins - 75579 Paris Cedex 12 - Tel. (33) 1 40 02 50 00 - Fax : 1 43 45 28 19

WEB SITE: <http://www.rohmhaas.com/ionexchange>



AMBERLITE is a trademark of Rohm and Haas Company, Philadelphia, U.S.A.

Ion exchange resins and polymeric adsorbents, as produced, contain by-products resulting from the manufacturing process. The user must determine the extent to which organic by-products must be removed for any particular use and establish techniques to assure that the appropriate level of purity is achieved for that use. The user must ensure compliance with all prudent safety standards and regulatory requirements governing the application. Except where specifically otherwise stated, Rohm and Haas Company does not recommend its ion exchange resins or polymeric adsorbents, as supplied, as being suitable or appropriately pure for any particular use. Consult your Rohm and Haas technical representative for further information. Acidic and basic regenerant solutions are corrosive and should be handled in a manner that will prevent eye and skin contact. Nitric acid and other strong oxidising agents can cause explosive type reactions when mixed with Ion Exchange resins. Proper design of process equipment to prevent rapid buildup of pressure is necessary if use of an oxidising agent such as nitric acid is contemplated. Before using strong oxidising agents in contact with Ion Exchange Resins, consult sources knowledgeable in the handling of these materials.

Rohm and Haas Company makes no warranties either expressed or implied as to the accuracy or appropriateness of this data and expressly excludes any liability upon Rohm and Haas arising out of its use. We recommend that the prospective users determine for themselves the suitability of Rohm and Haas materials and suggestions for any use prior to their adoption. Suggestions for uses of our products of the inclusion of descriptive material from patents and the citation of specific patents in this publication should not be understood as recommending the use of our products in violation of any patent or as permission or license to use any patents of the Rohm and Haas Company. Material Safety Data Sheets outlining the hazards and handling methods for our products are available on request.